
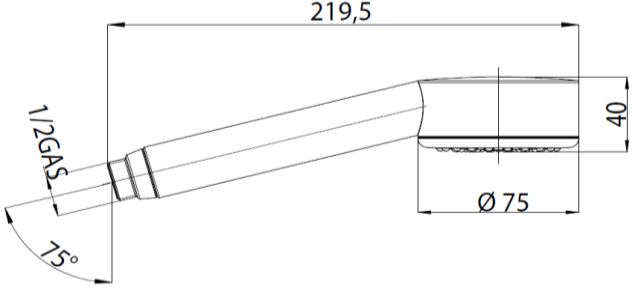
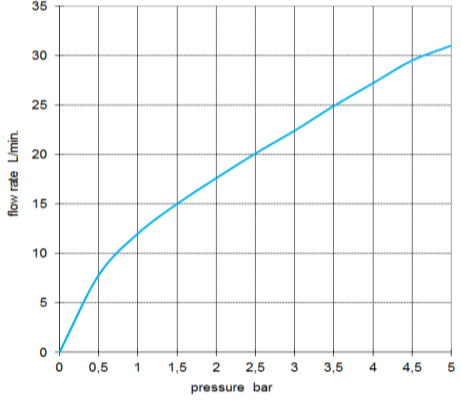


BOSSINI		SCHEDA TECNICA TECHNICAL SHEET		Date: 21/07/2017	Rev/0																										
<b>Codice / Code:</b> <b>B00161</b>		<b>Descrizione / description:</b> Doccia monogetto Single function handshower																													
<b>Foto / image</b>		<b>Disegni / drawings</b>																													
																															
<b>Grafico di portata / Flow rate diagram</b>																															
<table border="1"> <thead> <tr> <th></th> <th>rain</th> </tr> </thead> <tbody> <tr><td>0</td><td>0</td></tr> <tr><td>0,5</td><td>7,8</td></tr> <tr><td>1</td><td>12</td></tr> <tr><td>1,5</td><td>15</td></tr> <tr><td>2</td><td>17,6</td></tr> <tr><td>2,5</td><td>20,1</td></tr> <tr><td>3</td><td>22,4</td></tr> <tr><td>3,5</td><td>24,9</td></tr> <tr><td>4</td><td>27,2</td></tr> <tr><td>4,5</td><td>29,5</td></tr> <tr><td>5</td><td>31</td></tr> <tr> <td>pressure bar</td> <td>flow rate L/min</td> </tr> </tbody> </table>			rain	0	0	0,5	7,8	1	12	1,5	15	2	17,6	2,5	20,1	3	22,4	3,5	24,9	4	27,2	4,5	29,5	5	31	pressure bar	flow rate L/min				
	rain																														
0	0																														
0,5	7,8																														
1	12																														
1,5	15																														
2	17,6																														
2,5	20,1																														
3	22,4																														
3,5	24,9																														
4	27,2																														
4,5	29,5																														
5	31																														
pressure bar	flow rate L/min																														
<b>MATERIALI / materials</b>																															
ABS, Silicone, Nbr, Acetal																															
<b>CARATTERISTICHE IDRAULICHE / hydraulic features</b>																															
	pressione pressure	portata flow rate	temperatura temperature	solo per miscelatori termostatici only for thermostatic mixers																											
min	1 bar	--	--	Blocco di sicurezza safety lock	/																										
max	5 bar	--	<70°C	Temperatura acqua fredda cold water temperature	/																										
consigliata recommended	2-3 bar	--	<42°C	Temperatura acqua calda hot water temperature	/																										
<b>CERTIFICAZIONI / CERTIFICATIONS:</b>																															
ACS(FRA), NF [EN 1112] (FRA), WATERMARK [AS/NZS 3662:2005] (AUS), WELS PUB [1 thick] (SGP), CSA [ASME A112.18.1/CSA B125.1](CAN/USA), IAPMO [ASME A112.18.1/CSA B125.1] (USA/CAN).																															
<b>CONFORMITA' / CONFORMITY :</b>																															
Chrome plating - EN 248.																															