
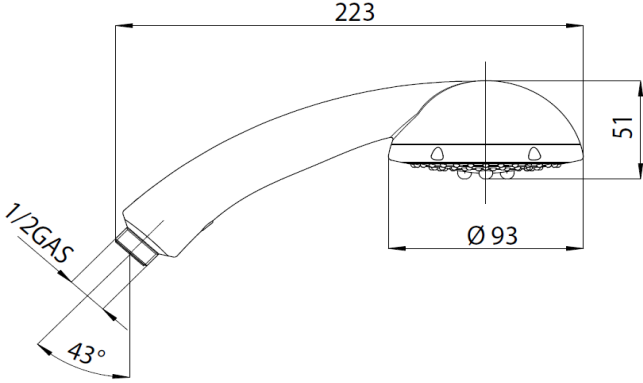
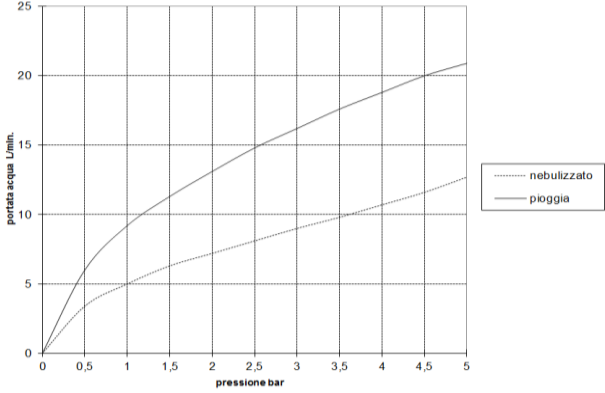


BOSSINI		SCHEDA TECNICA TECHNICAL SHEET		Date: 20/07/2017	Rev/0																																				
<b>Codice / Code:</b> <b>B00152</b>		<b>Descrizione / description:</b> Doccia 3 getti 3 function handshower																																							
<b>Foto / image</b>		<b>Disegni / drawings</b>																																							
																																									
<b>Grafico di portata / Flow rate diagram</b>																																									
		<table border="1"> <thead> <tr> <th></th> <th>nebulizzato</th> <th>pioggia</th> </tr> </thead> <tbody> <tr><td>0</td><td>0</td><td>0</td></tr> <tr><td>0,5</td><td>3,4</td><td>6</td></tr> <tr><td>1</td><td>5</td><td>9,2</td></tr> <tr><td>1,5</td><td>6,3</td><td>11,3</td></tr> <tr><td>2</td><td>7,2</td><td>13,1</td></tr> <tr><td>2,5</td><td>8,1</td><td>14,8</td></tr> <tr><td>3</td><td>9</td><td>16,2</td></tr> <tr><td>3,5</td><td>9,8</td><td>17,6</td></tr> <tr><td>4</td><td>10,7</td><td>18,8</td></tr> <tr><td>4,5</td><td>11,6</td><td>20</td></tr> <tr><td>5</td><td>12,7</td><td>20,9</td></tr> </tbody> </table>			nebulizzato	pioggia	0	0	0	0,5	3,4	6	1	5	9,2	1,5	6,3	11,3	2	7,2	13,1	2,5	8,1	14,8	3	9	16,2	3,5	9,8	17,6	4	10,7	18,8	4,5	11,6	20	5	12,7	20,9		
	nebulizzato	pioggia																																							
0	0	0																																							
0,5	3,4	6																																							
1	5	9,2																																							
1,5	6,3	11,3																																							
2	7,2	13,1																																							
2,5	8,1	14,8																																							
3	9	16,2																																							
3,5	9,8	17,6																																							
4	10,7	18,8																																							
4,5	11,6	20																																							
5	12,7	20,9																																							
pressione <b>bar</b>		portata <b>L/min</b>																																							
<b>MATERIALI / materials</b>																																									
ABS, Silicone, Nbr, Acetal																																									
<b>CARATTERISTICHE IDRAULICHE / hydraulic features</b>																																									
	pressione pressure	portata flow rate	temperatura temperature	solo per miscelatori termostatici only for thermostatic mixers																																					
min	<b>1 bar</b>	--	--	Blocco di sicurezza safety lock	/																																				
max	<b>5 bar</b>	--	<b>&lt;70°C</b>	Temperatura acqua fredda cold water temperature	/																																				
consigliata recommended	<b>2-3 bar</b>	--	<b>&lt;42°C</b>	Temperatura acqua calda hot water temperature	/																																				
<b>CERTIFICAZIONI / CERTIFICATIONS:</b>																																									
ACS(FRA), NF [EN 1112] (FRA), WATERMARK [AS/NZS 3662:2005] (AUS), WELS PUB [1 thick] (SGP), CSA [ASME A112.18.1/CSA B125.1](CAN/USA), IAPMO [ASME A112.18.1/CSA B125.1] (USA/CAN).																																									
<b>CONFORMITA' / CONFORMITY :</b>																																									
Chrome plating - EN 248.																																									